


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁴ : F02D 11/10, B60K 26/02	A1	(11) International Publication Number: WO 89/ 07706 (43) International Publication Date: 24 August 1989 (24.08.89)
<p>(21) International Application Number: PCT/US89/00591</p> <p>(22) International Filing Date: 14 February 1989 (14.02.89)</p> <p>(31) Priority Application Number: 157,766</p> <p>(32) Priority Date: 18 February 1988 (18.02.88)</p> <p>(33) Priority Country: US</p> <p>(71) Applicant: SIEMENS-BENDIX AUTOMOTIVE ELECTRONICS L.P. [US/US]; 900 Wilshire Drive, Suite 150, Troy, MI 48084 (US).</p> <p>(72) Inventor: IMOEHL, William, James ; 112 Barlows Run, Williamsburg, VA 23185 (US).</p> <p>(74) Agent: WELLS, Russel, C.; Siemens-Bendix Automotive Electronics L.P., 900 Wilshire Drive, Suite 150, Troy, MI 48084 (US).</p>		<p>(81) Designated States: AT (European patent), BE (European patent), BR, CH (European patent), DE (European patent), FR (European patent), GB (European patent), IT (European patent), JP, KR, LU (European patent), NL (European patent), SE (European patent).</p> <p>Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>

(54) Title: ACCELERATOR CONTROL APPARATUS

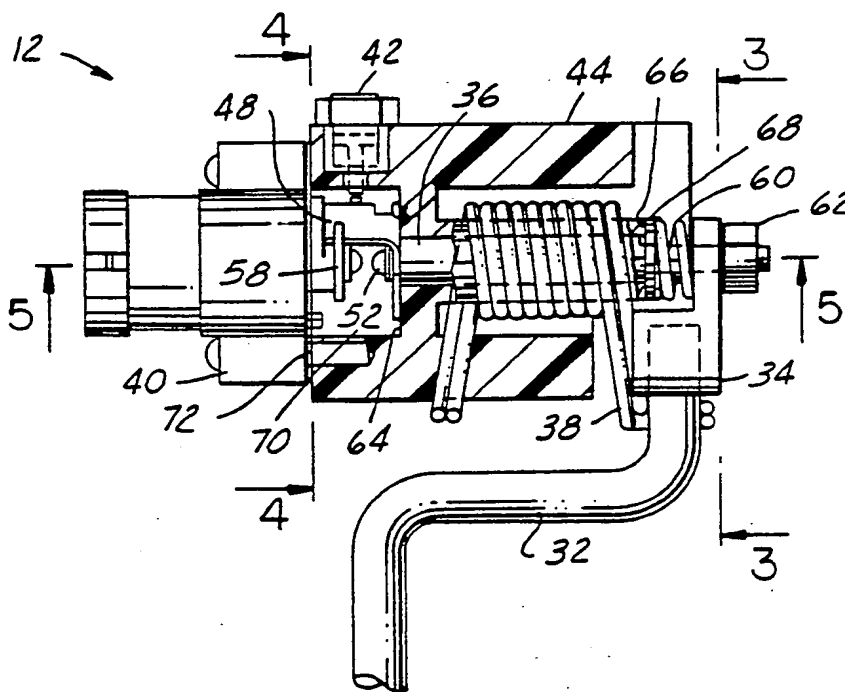

(57) Abstract

An accelerator control apparatus (12) for mounting in a motor vehicle for a "drive-by-wire" system. The apparatus provides a bias spring means (38) to generate the "feel" of an accelerator pedal (28) to the vehicle operator, a compression spring means (60) provides frictional forces preventing extraneous pedal (28) actuation and pedal sensor switch means (42) for indicating the rotation position of the accelerator pedal (28) from a first or normal position ("A") to any second position.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	ML	Mali
AU	Australia	GA	Gabon	MR	Mauritania
BB	Barbados	GB	United Kingdom	MW	Malawi
BE	Belgium	HU	Hungary	NL	Netherlands
BG	Bulgaria	IT	Italy	NO	Norway
BJ	Benin	JP	Japan	RO	Romania
BR	Brazil	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	LI	Liechtenstein	SN	Senegal
CH	Switzerland	LK	Sri Lanka	SU	Soviet Union
CM	Cameroon	LU	Luxembourg	TD	Chad
DE	Germany, Federal Republic of	MC	Monaco	TG	Togo
DK	Denmark	MG	Madagascar	US	United States of America
FI	Finland				

-1-

ACCELERATOR CONTROL APPARATUS

This invention relates to an accelerator control apparatus for motor vehicles in general and more particularly for an accelerator control apparatus for an electronic drive control system for a motor vehicle having an internal combustion engine.

BACKGROUND OF INVENTION

10 Conventional control of an accelerator in an internal combustion engine involves a series of links and linkages from a foot pedal in the passenger compartment of a motor vehicle to the butterfly valve or throttle blade in the air intake of the engine. To
15 provide "feel" to the pedal and to return the throttle blade to idle, one or more heavy springs are positioned in the control chain of the accelerator to the throttle blade. Each link, spring and pivot position provides a source for misadjustment and failure. Failure because
20 of corrosion and dirt between the pivot surfaces and the coils of the springs and misadjustment because of wear and looseness in the connection of the links.

SUMMARY OF THE INVENTION

25 Drive-by-wire or electronic throttle control is a concept where the motion of the foot pedal or accelerator control in the operator compartment of the vehicle is transferred by electrical signals to an actuator for moving the butterfly valve. The actuator
30 in most instances is a d.c. motor which rotates the throttle blade from a substantially closed throttle position to a wide open throttle position. Positioning is determined in a servo controlled manner.

-2-

The communication between the accelerator control and the actuator in electronic throttle control is by means of signal wires and not heavy control links and linkages. The accelerator control is an apparatus which
5 is mounted in the passenger compartment and to an operator it must have the "feel" and "operation" of a conventional accelerator apparatus in a non-electronic throttle controlled vehicle.

It is a principal advantage of the accelerator
10 control apparatus of the present embodiment to transfer the rotation of the accelerator by means of electrical signals to the actuator on the throttle body of the internal combustion engine.

It is a further advantage of the accelerator
15 control apparatus of the present embodiment to provide an apparatus that has the "feel" and "operation" of a conventional accelerator apparatus.

It is yet another advantage of the accelerator control apparatus of the present embodiment to provide
20 an enclosed control apparatus shielded from external dirt and other means causing malfunction of the various elements of the apparatus.

These and other advantages will become apparent from the accelerator control apparatus for an electronic
25 drive control system for an internal combustion engine having housing for an accelerator pedal control means. A shaft means is journaled in the housing and is coupled through a coupling means to the accelerator means. At least one bias spring means is mounted on the
30 shaft means with one end of the spring means coupled to the accelerator pedal control means and the other end of the bias spring means secured to the housing to bias the accelerator pedal control means in a first position or home position.

-3-

A pedal sensor switch means responsive to the accelerator pedal for generating a first electrical signal indicative of the pedal in its first position and operable to operate a third electrical signal when the
5 pedal is in any second position.

A position sensor means is positioned in the housing and is operable to generate a second electrical signal to indicate when the position of the accelerator pedal control means rotates from its first position to
10 any other of a number of second positions. As used herein, any position other than a first position is a second position. The sensor means generates an electrical signal which is transmitted to the actuator on the throttle body.

15 In the overall system, the electronic control can sense the position of both the position sensor and the pedal sensor and provide one of many checks to determine operation of the accelerator control apparatus.

Many other objects and purposes of the invention
20 will be clear from the following detailed description of the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings:

25 FIGURE 1 is block diagrammatic schematic of an electronic throttle control system illustrating the relationship of the accelerator control apparatus with the other elements of the system.

FIGURE 2 is a plan view of the accelerator control
30 apparatus with parts broken away for clarity.

FIGURE 3 is one end view of the accelerator control apparatus taken along line 3-3 in FIGURE 2.

FIGURE 4 is the other end view of the accelerator control apparatus taken along line 4-4 in FIGURE 2 and
35 illustrating the end of the shaft means.

-4-

FIGURE 5 is a sectional view taken along line 5-5 in FIGURE 2; and

FIGURE 6 is a graphic representation of the relationship of the angular movement of the accelerator pedal and the response of the position sensor.

DESCRIPTION OF THE PREFERRED EMBODIMENT

FIGURE 1 is schematic block diagram of a portion of a motor vehicle illustrating the relationship among the several elements of an electronic throttle control system. In the occupant compartment 10 there is the accelerator control apparatus 12 of the present invention. This is illustrated mounted to the floor 14 of the occupant compartment 10. An electric wire cable 15 16 connects the accelerator control apparatus 12 to an electronic control unit or ECU 18 which contains the electronic logic for operating the electronic throttle control system. This ECU 18 may be a dedicated ECU in that it only controls the throttle or it may be a part 20 of a large engine or vehicle control system ECU.

The cable 16 also connects both the ECU 18 and the accelerator control apparatus 12 to the throttle actuator 20 mounted on the throttle body 22 on the engine 24 for controlling the rotation of the throttle blade 26. The electronic throttle system is also called a "drive-by-wire" system since the connection between the driver and the throttle blade 26 is by means of electric wires or cable 16 and not rigid linkages.

As illustrated in FIGURE 1, the accelerator pedal 28, as it is rotated by the engine operator, moves between two extreme positions. The first position "A", which is one extreme position is the normal position or at rest position which is when the vehicle engine is

-5-

idling and operator is not actuating the accelerator 28. The other extreme position "B", which is just one of many second positions, is in the preferred embodiment defined by the accelerator pedal 28 bottoming on the floor 14 of the vehicle. Of course, this position can be limited by other means which do not require the accelerator pedal 28 to reach the floor. As used herein, any position other than the first position is a second position.

10 FIGURE 2 is a plan view of the accelerator control apparatus housing 44 with the top cover 30 removed to show the relationship of the several elements of apparatus 12. There is illustrated the accelerator pedal control means 32, more particularly the arm from the pedal 28 to the apparatus 12, the coupling means 34, a shaft means 36, a bias spring means 38, a position sensor means 40 and a pedal sensor switch means 42. The arm from the pedal 28 is received in the pedal coupling means 34 and secured there by suitable fastening means 20 such as brazing or pinning. As previously stated, the normal position of the accelerator control apparatus 12 is with the accelerator pedal control means 34 not being actuated and the pedal coupling means in the upper position "A" as illustrated in solid lines in FIGURE 3.

25 The coupling means 34, in the preferred embodiment, is secured to the shaft means 36 which is journaled in the housing 44. The coupling means 34 has a slot 46 with parallel sides matching the end profile of the shaft means 36 and it is through this slot that the 30 coupling means 34 rotates the shaft means 36 in response to the pivoting of the pedal 28 by the operator.

Secured to the other end of the shaft means 36 is a sensor actuator means 48 which when rotated actuates both the position sensor means 40 and the pedal sensor

-6-

switch means 42. The actuator means 48 is secured to the shaft means 36 for rotation therewith by means of a slot 50 with parallel sides which matches the end profile of the shaft means 36. Additionally, the actuator means 48 is prevented from coming off the shaft means by suitable fastening means 52.

The actuator means 48, in the preferred embodiment has two actuation surfaces as illustrated in Figure 4. The first actuation surface 54 is a paddle-like surface which operates to depress the actuator of the pedal sensor switch means 42. The second actuation surface 56 is another paddle-like surface which bears against a lever 58 for operating the position sensor means 40.

The pedal sensor switch means 42 in the preferred embodiment is a normally closed switch that is open when the actuator means 48 is in its normal position and generates a first electrical signal and as soon as the actuator means 48 is rotated by the shaft means 36, the first actuation surface 54 moves away from the switch actuator causing the switch contacts to close generating a third electrical signal.

An alternative to the normally closed switch is a pedal pressure sensor means 57 which is actuated by "foot-on" pressure being applied to the accelerator pedal 28. In the alternative, this sensor could respond to the rotation of the coupling means 34 or shaft means 36.

The position sensor means 40 in the preferred embodiment is a rotary switch wherein its angular displacement is adaptable to generate a second electrical signal indicative of such displacement. In the preferred embodiment, such a position sensor means 40 may be that described in United States Patent 4,355,293 issued on October 19, 1982 to Barry J.

-7-

Driscoll and entitled "Electrical Resistance Apparatus Having Integral Shorting Protection" which is assigned to a common assignee and is incorporated herein by reference.

5 The position sensor means 40 is essentially a variable resistance and as the lever 58 is rotated, wipers inside the sensor means 40 move across a resistance. There are three wire leads to the sensor, one lead is generally a voltage power lead and is
10 connected to one end of the variable resistance, a second lead is connected to the wipers and a third lead is connected to the other end of the variable resistance and is generally a ground lead. As the lever 58 is rotated, the lead connected to the wipers has an output
15 voltage signal relative to the position of the wipers on the variable resistance.

As illustrated in the FIGURES, there is a bias spring means 38 which is a torsion spring having one end secured to the housing 44 and a second end coupled to
20 the accelerator pedal control means 32. The coils of the bias spring means 38 surround the shaft means 36 but do not inhibit its rotation. The function of the bias spring means 38 is to bias the accelerator pedal control means 32 in its normal position "A". As the accelerator
25 pedal control means 32 is rotated, the bias spring means 38 applies an opposite rotational force to the accelerator pedal control means 32 giving the requisite "feel" to the vehicle operator. When the accelerator pedal 28 is released, the bias spring means 38 operates
30 to return the accelerator pedal 28 to its normal position. For redundancy, the bias spring means 38 may have more than one spring, with each having sufficient torsional force to return the accelerator pedal 28 to its normal position.

-8-

Another element of the acceleration control apparatus 12 which affects "feel" is friction. To mimic the "feel" of a rigid linkage actuated system and to aid the driver in holding the accelerator pedal 28 in a given position even on the bumpiest roads a controlled amount of hysteresis or frictional force is provided in the apparatus 12. A second bias means or compression spring 60 is positioned over the shaft means 36 between the coupling means 34 and the housing 44. By a fastening means 62 or threaded member such as a nut, the ends of the shaft means 36 are drawn against the surfaces 64, 66 of the housing 44 or an intermediate washer means 68. The more the spring 60 is compressed, the greater is the force normal to the surface of the housing 44 and washer means 68 the greater is the frictional force. In the preferred embodiment the housing 44 and/or the intermediate washer means 68 is fabricated from an aramid fiber composition, a "highly orientated polyethelene", or a long glass fiber nylon. This material gives a non-abrasive wear resistance to the normal forces applied by the compression spring 60 and operates to extend the operational life of the accelerator control apparatus 12.

The housing 44, in the preferred embodiment, is fabricated in such a manner to place the several groupings of elements in substantially enclosed pockets or volumes in order to keep dirt and other foreign articles from interferring. In particular each end of the shaft means 36 may terminate in one such enclosed pocket 70 which is formed by the housing 44 and one or more outside covers 72.

FIGURE 6 is a graphic representation of the adjustment of the accelerator control apparatus 12 and the the position sensor means 40. The actuator means 48

-9-

is so positioned so that in its normal position "A", the output of the position sensor means 40 is at one of the voltage extremes; shown here as ground. In actual practice the total arc 74 of rotation of the accelerator pedal control means 32 is approximately forty degrees and as illustrated on the graph this range is from the normal position "A" to part way up the slope of the position sensor means 40 output. This feature is needed for repeatability and also makes the assembly of the apparatus 12 much simpler and hence not as expensive.

Another feature provided in the design of the housing 44 is a built-in stop 76 defining the normal position "A". The stop 76 bears against the coupling means 34 in the normal position. As previously mentioned the extreme second position "B" may be limited by the pedal 28 against the floor 14 of the vehicle or in the alternative, the housing may also have a second built-in stop surface, not shown, to control the rotational movement of the accelerator pedal control means 28 or the coupling means 34.

The pedal sensor switch means 42, being a normally closed switch, can be used to check the position of the accelerator pedal 28. The output of the switch can be compared with the position sensor means 40 and the integrity of the apparatus 12 may be determined. For instance if the pedal sensor switch means 42 is open and the position sensor means 40 is generating an output voltage that is not the normal position voltage, this is an indication of a mismatch in the system and the ECU will determine the action to take. Conversely, if the pedal sensor switch means 42 fails and is in a closed position when the position sensor means 40 is in the normal position "A", this is an indication of a mismatch.

-10-

Another mismatch indication is when the output of the position sensor means 40 is at the opposite extreme voltage from the normal position voltage level. This might indicate a shorted position sensor means 40. 5 Still another mismatch that can be detected by comparing the outputs of the position sensor means 40 and the pedal sensor switch means 42 is that with a normally closed switch, a broken wire can be distinguished from a "foot-on" condition on the accelerator pedal 28.

10 There has thus been described an accelerator control apparatus 12 for an electronic drive control system for an internal combustion engine 24 having an enclosed housing 44 for an accelerator pedal control means 32. The accelerator pedal control means 32 15 provides the "feel" to the vehicle operator necessary for successful vehicle operation and provides diagnostic capability to determine the integrity of the apparatus 12. In the overall system, an electronic control can sense the position of both the position sensor means 40 20 and the pedal sensor switch means 42 and provide one of many checks to determine operation of the accelerator control apparatus 12.

Many changes and modifications in the above described embodiment of the invention can, of course, be 25 carried out without departing from the scope thereof. Accordingly, that scope is intended to be limited only by the scope of the appended claims.

-11-

IN THE CLAIMS

I Claim:

- 5 1. An accelerator control apparatus (12) for an
electronic drive control system for an internal
combustion engine (24), said apparatus comprising:
 pedal means (28) adapted to be rotated from a first
 position ("A") to another position;
10 shaft means (36);
 bias spring means (38) normally biasing said pedal
 means in said first position ("A");
 position sensor means (40) rotatively coupled to
 said shaft means (36) for generating an electrical
15 signal indicative of the angle of rotation thereof;
 pressure switch means (57) coupled to said pedal
 means (28) and responsive to pressure applied to pivot
 said pedal means for generating a second electrical
 signal indicative of said pedal means being rotated; and
20 friction means (68) at the end of said shaft means
 (36), providing friction forces to said shaft means (36)
 for damping the rotation of said shaft means (36).
2. An accelerator control apparatus for an
25 electronic drive control system for an internal
combustion engine, said apparatus comprising:
 a housing (44);
 accelerator pedal control means (32);
 shaft means (36) journaled in said housing;
30 coupling means (34) for coupling said accelerator
 pedal control means (32) to said shaft means (36);
 bias spring means (38) operable to bias said
 accelerator pedal control means in a first position
 ("A"), one end of said bias spring means coupled to said
35 accelerator pedal control means (32) and the other end
 of said bias spring means secured to said housing (44);

-12-

pedal sensor switch means (42) responsive to said accelerator pedal control means (32) in said first position ("A") for generating a first electrical signal indicative of said pedal control means (32) in said
5 first position ("A"); and

position sensor means (40) operable to generate a second electrical signal to indicate a second position of said accelerator pedal control means (32) as said accelerator pedal control means rotates from said first
10 position ("A") to said second position.

3. An accelerator control apparatus (12) connected to an accelerator pedal (28) for an internal combustion engine, said apparatus comprising:

15 a housing (44);

coupling means (34) coupled to said housing (44) and the accelerator pedal (28) and mounted for rotation from a first position ("A") to one of a plurality of second positions;

20 shaft means (36) journaled in said housing (44) and adapted to be rotated by said coupling means (34);

bias spring means (38) coupled to said shaft means (36) and operable to bias said coupling means (34) in said first position ("A");

25 sensor means (42) responsive to said coupling means (34) in said first position ("A") for generating a first electrical signal and when said coupling means (34) is in said second position for generating a third electrical signal; and

30 means (44) responsive to the rotation of said shaft means (36) in response to said coupling means (34) for generating a second electrical signal indicating the amount of rotation from said first position ("A") to said second position.

-13-

4. An accelerator control apparatus for an internal combustion engine according to Claim 3 additionally including a second bias means (60) for preloading said shaft means (36) against rotation.

5



5. An accelerator control apparatus (12) for an internal combustion engine according to Claim 4 wherein said second bias means includes friction washer means (68) around said shaft means (36) and bearing against said housing (44), and a compression spring (60) around said shaft means and bearing against said friction washer means and said coupling means (34).





6. An accelerator control apparatus for an internal combustion engine according to Claim 3 wherein sensor means (42) responsive to said coupling means (34) in said first position ("A") for generating a first electrical signal and when said coupling means (34) is in said second position for generating a third electrical signal, is a pressure sensor (57) responsive to the pressure on said coupling means rotating said coupling means from said first position for generating said third electrical signal.

7. An accelerator control apparatus for an internal combustion engine according to Claim 3 wherein said sensor means (42) responsive to said coupling means (34) in said first position ("A") for generating a first electrical signal and when said coupling means is in said second position for generating a third electrical signal, is a switch actuated by a sensor actuating means (48) rotating from said first position for generating said third electrical signal.

-14-

8. An accelerator control apparatus for an internal combustion engine according to Claim 7 wherein said switch means (42) is a normally closed switch actuated by said sensor actuating means (48) in said first position and normalized by said coupling means (34) in said second position.

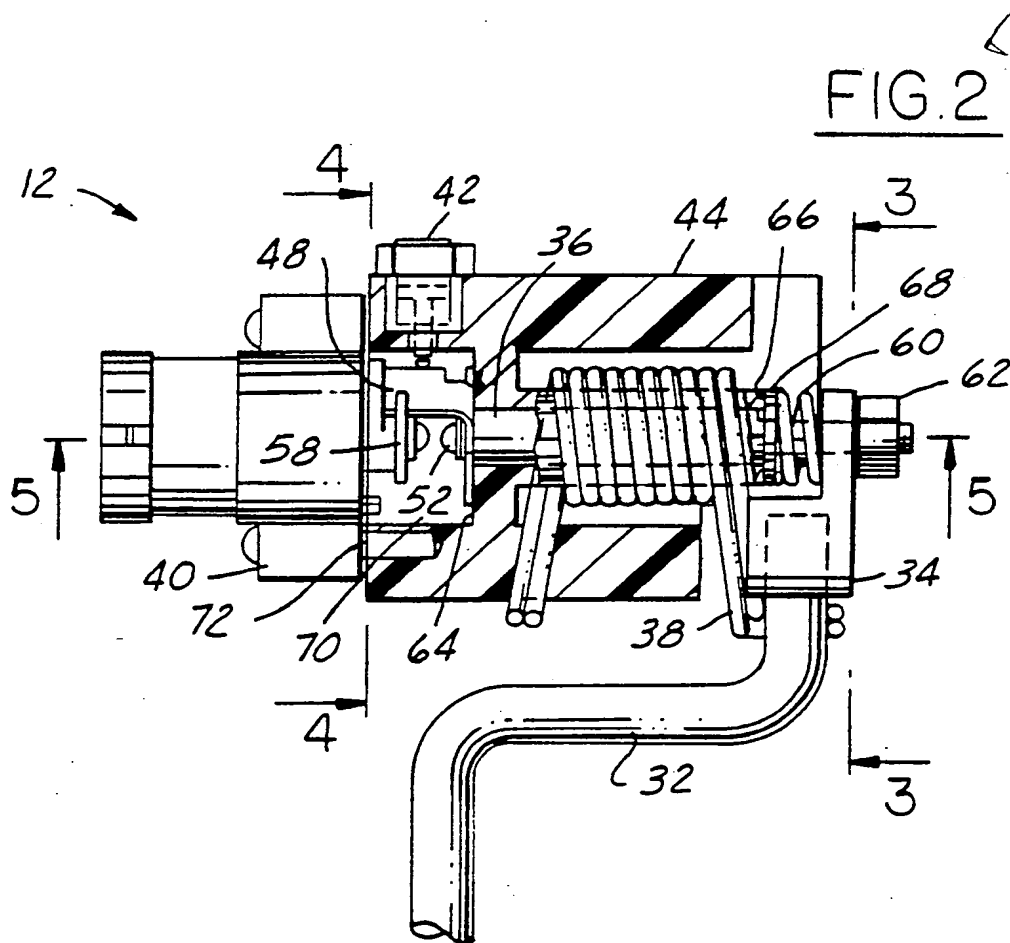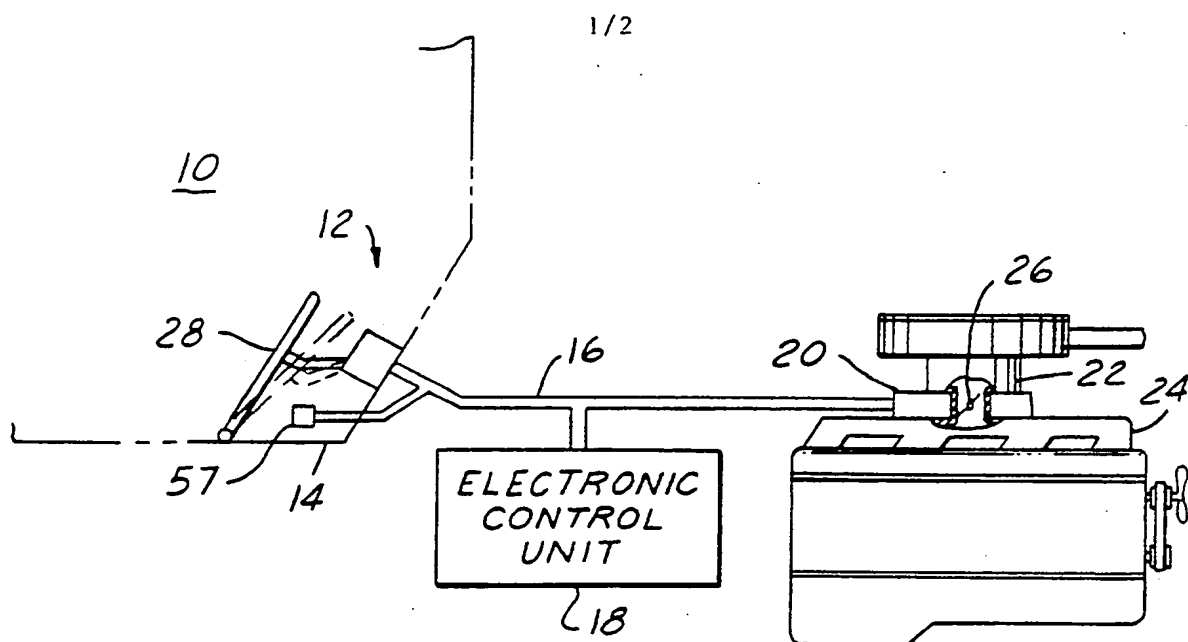

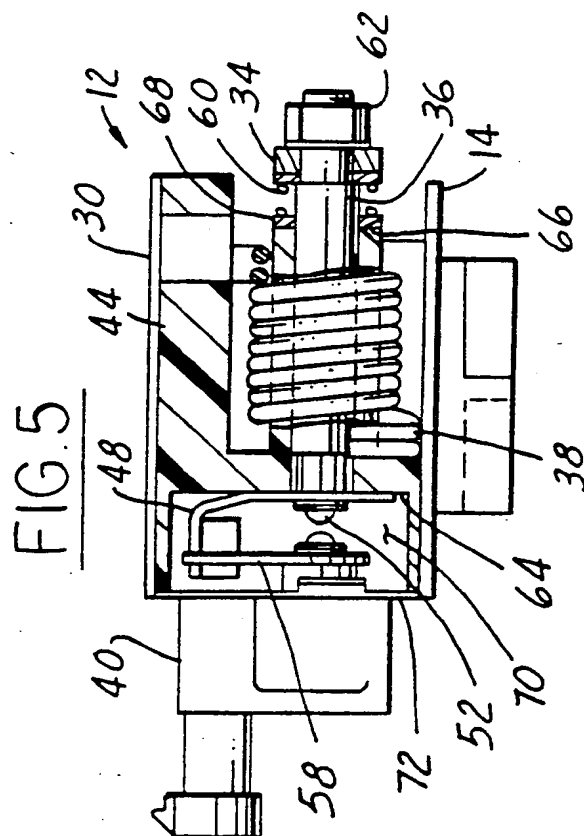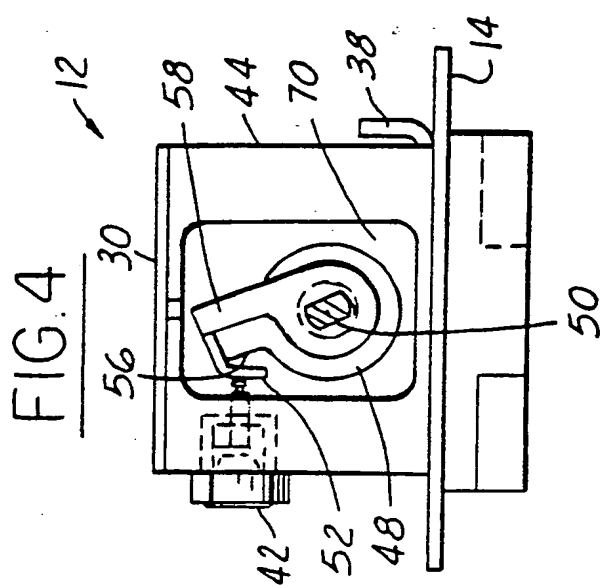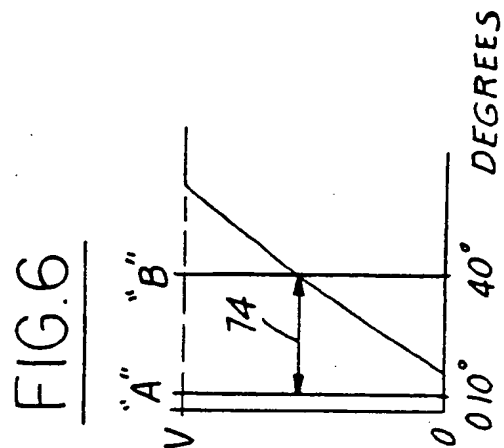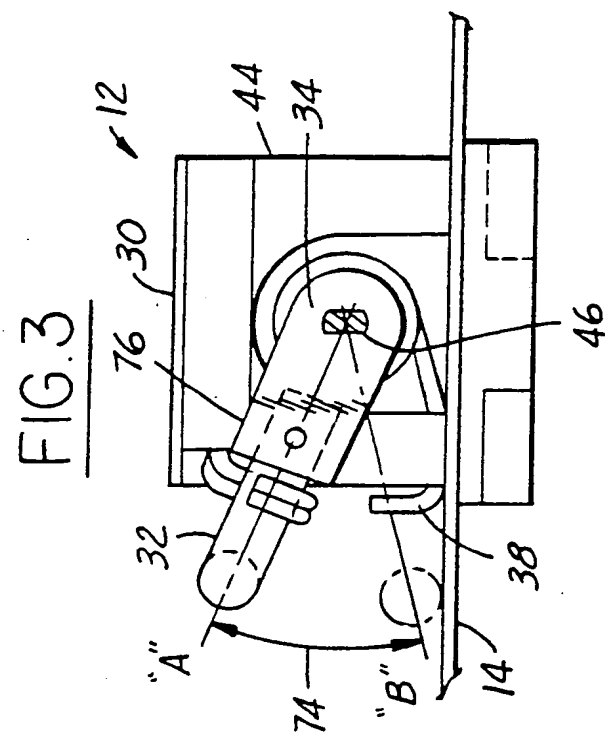

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 89/00591

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) *		
According to International Patent Classification (IPC) or to both National Classification and IPC		
IPC ⁴ : F 02 D 11/10; B 60 K 26/02		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
IPC ⁴	F 02 D; B 60 K; G 05 G	
Documentation Searched other than Minimum Documentation to the extent that such Documents are included in the Fields Searched *		
III. DOCUMENTS CONSIDERED TO BE RELEVANT ⁸		
Category *	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
Y	WO, A, 83/00534 (AUDI) 17 February 1983 see page 4, line 17 - page 6, line 22; figures 2,3 --	1,2,4,7,8
Y	US, A, 2916946 (HARRISON) 15 December 1959 see column 1, lines 63-72; column 2, lines 10-15; column 2, line 40 - column 3, line 43; figures 1-3 --	1,2,4,7,8
A	US, A, 4246803 (KLIS et al.) 27 January 1981 see figures; column 1, lines 44-68; column 2, lines 46-53; column 3, lines 1-38 --	1,5
A	Patent Abstracts of Japan, volume 9, no. 249 (M-419)(1972), 5 October 1985, & JP, A, 6099729 (NISSAN JIDOSHA K.K.) 3 June 1985 -- ./.	1,6
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>* Special categories of cited documents: ¹⁰</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> </div> </div>		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
16th May 1989	13 JUN 1989	
International Searching Authority	Signature of Authorized Officer	
EUROPEAN PATENT OFFICE	P.C.G. VAN DER PUTTEN	

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)

Category *	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No
------------	--	----------------------

A	FR, A, 2368080 (BOSCH) 12 May 1978 see page 1, lines 1-18; page 3, lines 22-35; page 4, lines 4-12; figures	1,3
---	--	-----

ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO.

US 8900591
SA 27227

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on 07/06/89. The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A- 8300534	17-02-83	DE-A, C 3131553	24-02-83
		EP-A- 0085082	10-08-83
		US-A- 4524740	25-06-85

US-A- 2916946		None	

US-A- 4246803	27-01-81	None	

FR-A- 2368080	12-05-78	DE-A- 2646793	20-04-78
		GB-A- 1588255	23-04-81
		JP-A- 53051826	11-05-78
		NL-A- 7711111	18-04-78
